


OUTDOOR HOUSING FOR VIDEO PROJECTORS

Install your beamer or laser projector outdoor with no worries about dust, weather, and thefts.



30
YEARS

PROIETTA[®]
COM

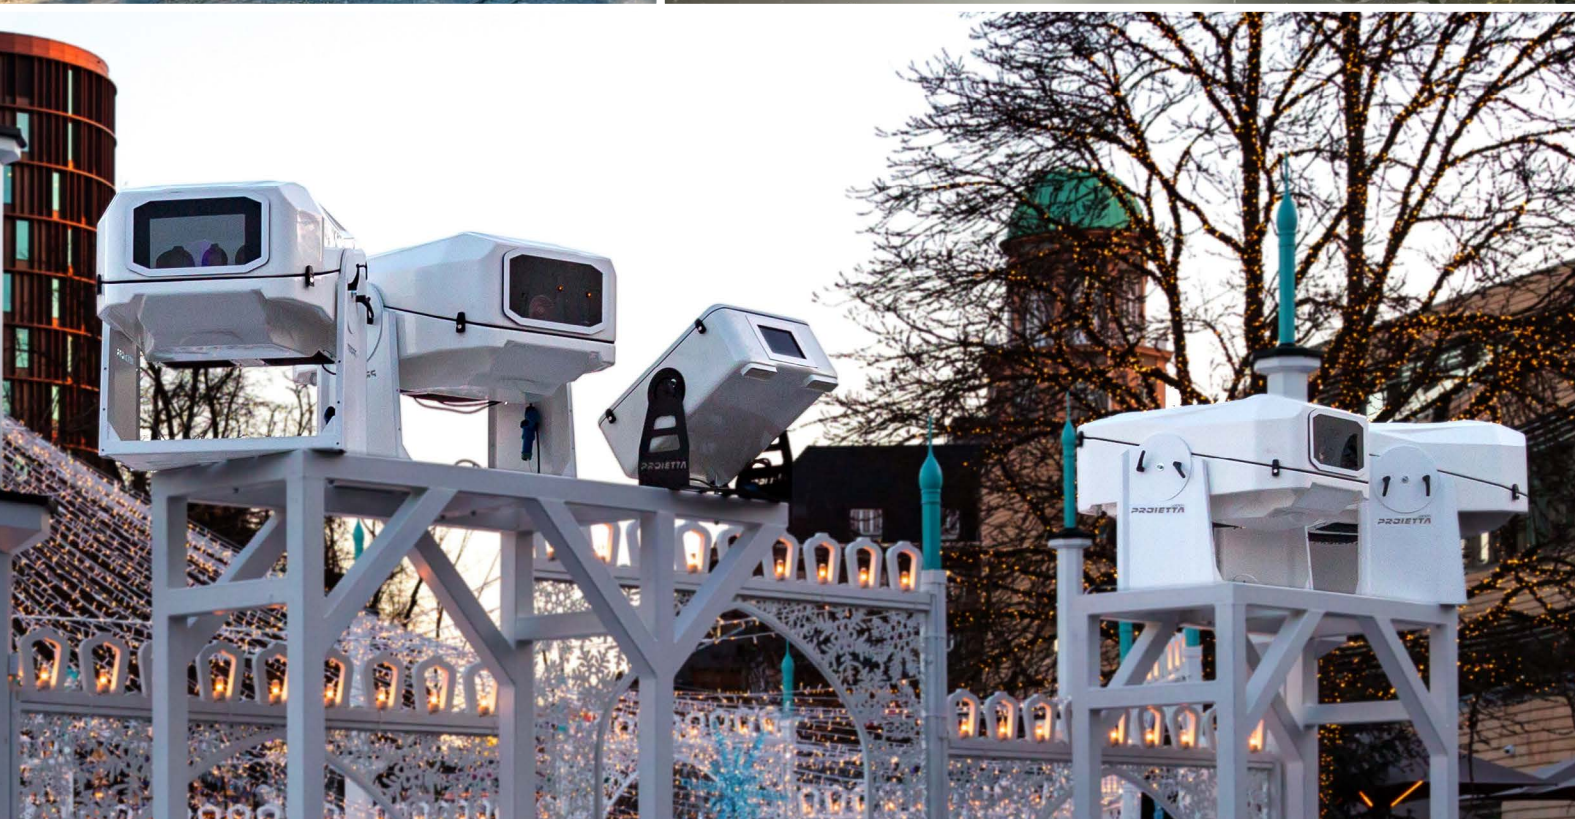

PROIETTA **DESIGNS** CUSTOMIZED ENCLOSURES AND ACCESSORIES ACCORDING TO SPECIFIC REQUESTS



S. FRANCISCO - Let's Glow SF

All projectors have limited operating conditions based on a range of temperature and humidity. PROIETTA has created protection systems for outdoor implementation of 3D video mapping, water screens, and more. These devices, through a forced-air ventilation function, allow the use of beamers and laser projectors in outdoor environments without issues related to climatic conditions.

BUILT MATERIALS:

- fiber glass
- aluminium
- stainless steel


The PROIETTA case enclosure are all suitable for:



LASER



LANDSCAPE



PORTRAIT





STACK



MULTI
PORTRAIT

AF6

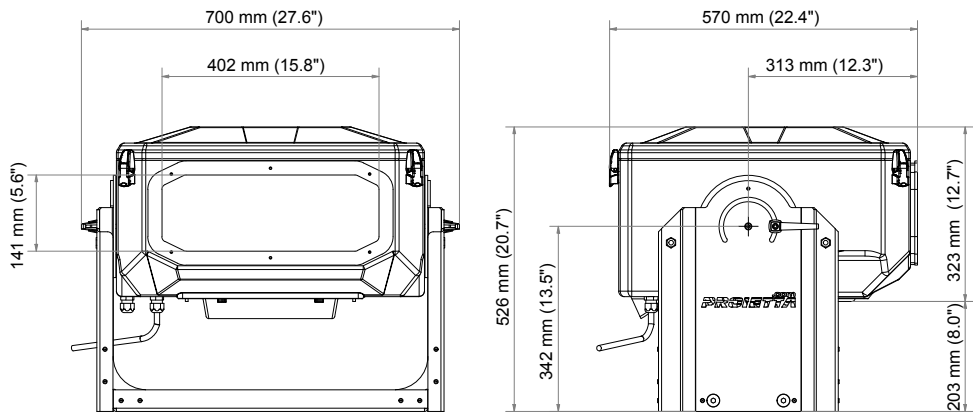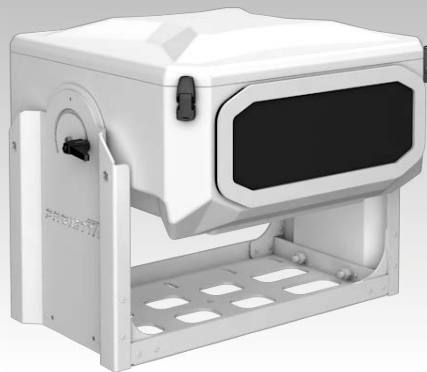

SPECIFICATIONS:

WEIGHT: 30,0 kg (66.1lbs)

CONSUMPTION:
Max consumption cooling mode: 50 W / 0,2 A
Max consumption during heating and dehumidification mode: 330 W / 1,5 A

INTERNAL SIZES OF THE AF6 MODEL		
	METRIC UNITS	ENGLISH UNITS
width	480 mm	18.9"
height	200 mm	7.9"
depth	360 mm	14.2"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

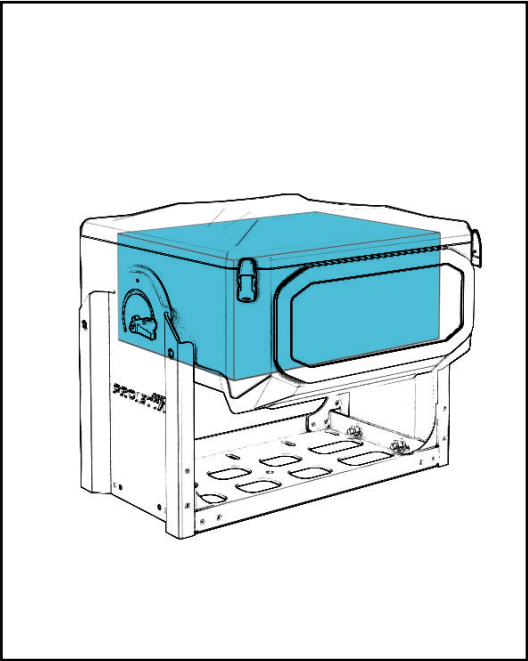

AF6-H

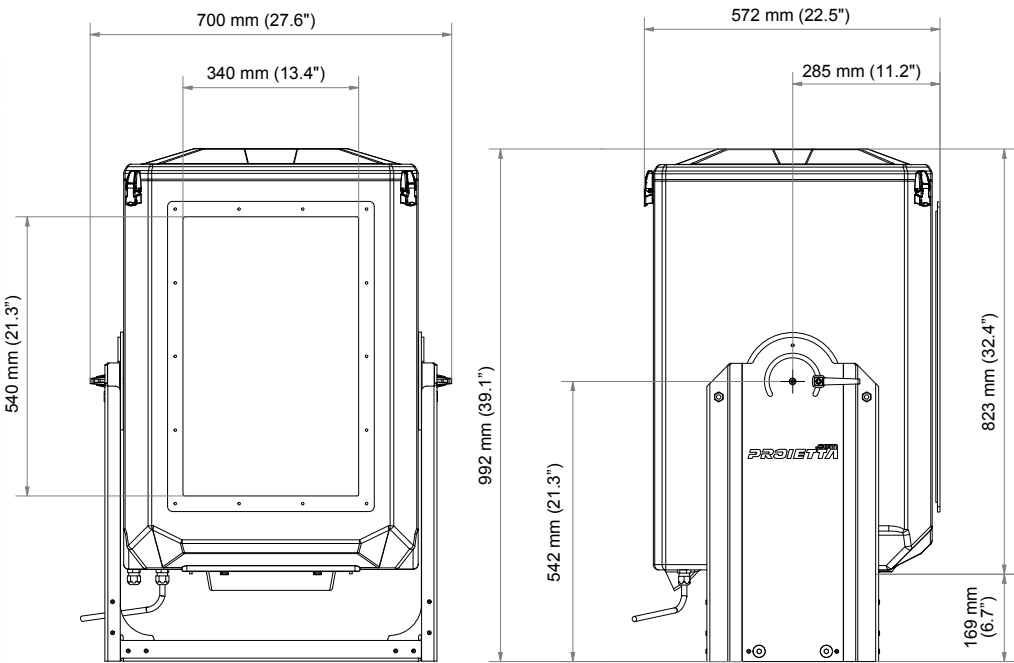


SPECIFICATIONS:


WEIGHT: 45,0 kg (99.2 lbs)


CONSUMPTION:
Max consumption cooling mode: 50 W / 0,2 A
Max consumption during heating and dehumidification mode: 330 W / 1,5 A


INTERNAL SIZES OF THE AF6-H MODEL		
	METRIC UNITS	ENGLISH UNITS
width	480 mm	18.9"
height	700 mm	27.6"
depth	360 mm	14.2"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

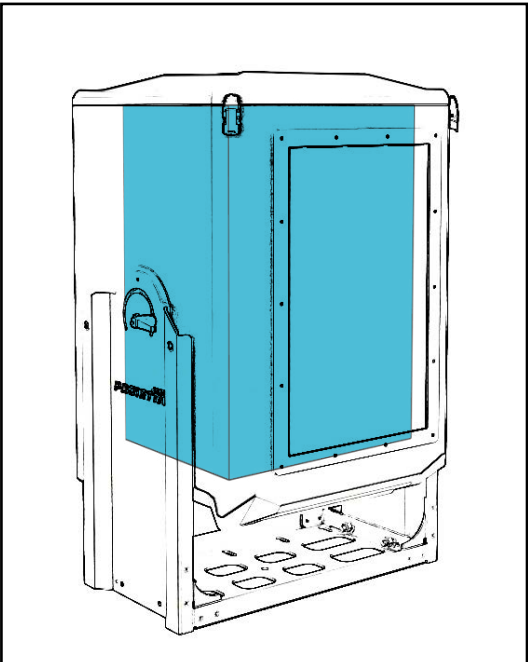

AF10

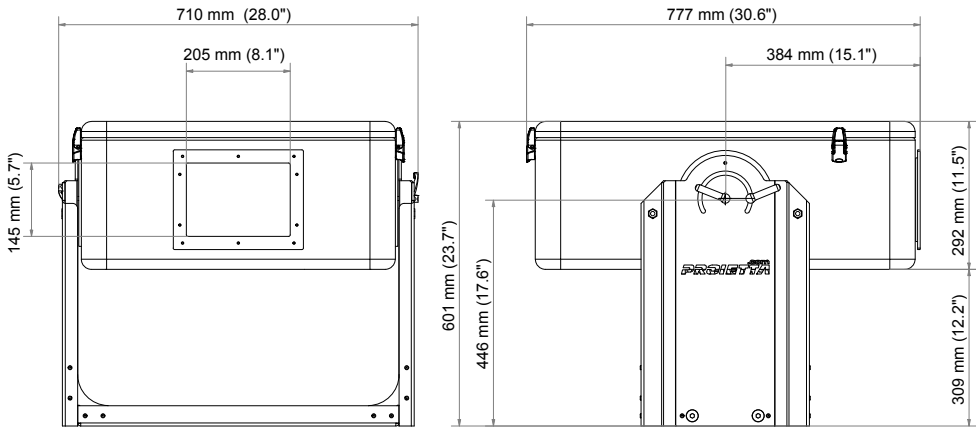

SPECIFICATIONS:

WEIGHT: 37,0 kg (81.6 lbs)

CONSUMPTION:
Max consumption cooling mode: 50 W / 0,2 A
Max consumption during heating and dehumidification mode: 330 W / 1,5 A

INTERNAL SIZES OF THE AF10 MODEL		
	METRIC UNITS	ENGLISH UNITS
width	530 mm	20.9"
height	250 mm	9.8"
depth	500 mm	19.7"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

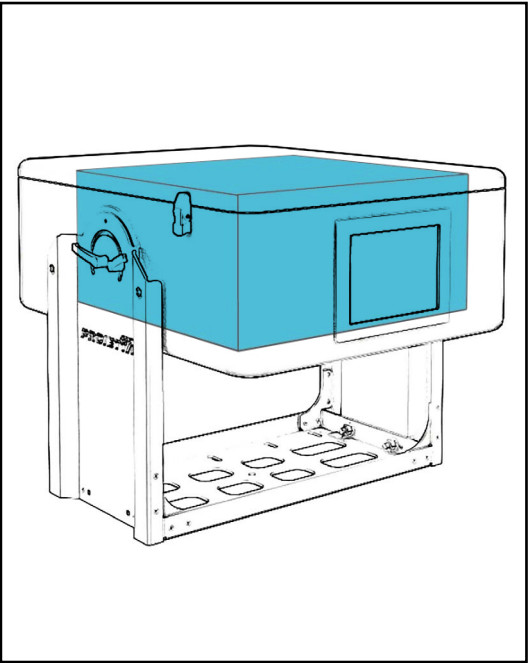

AF10-H

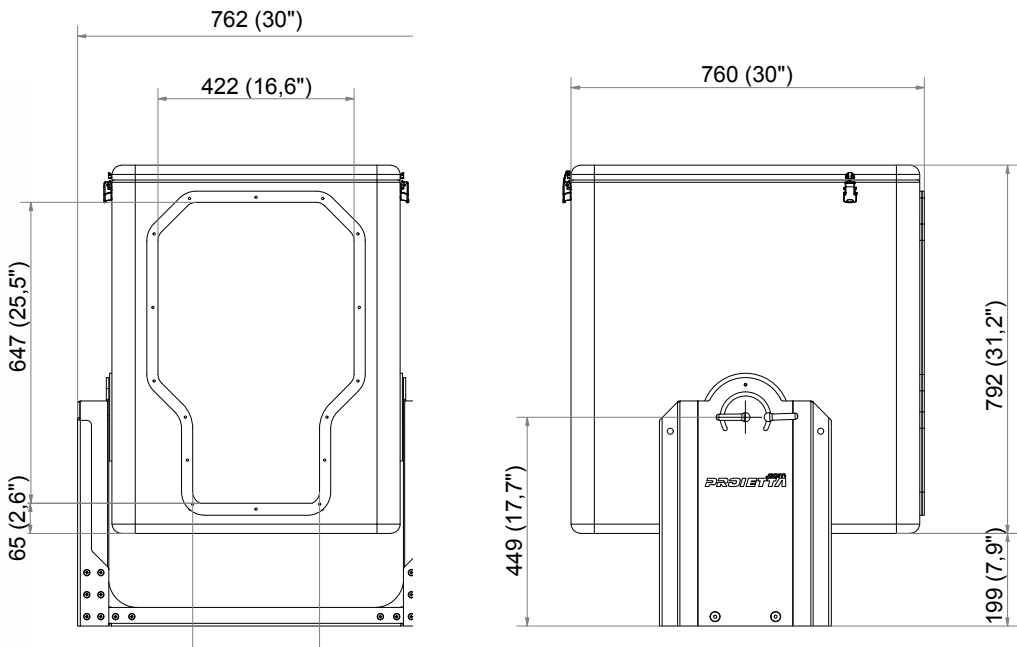


SPECIFICATIONS:


WEIGHT: 55,0 kg (121.3 lbs)


CONSUMPTION:
Max consumption cooling mode: 50 W / 0,2 A
Max consumption during heating and dehumidification mode: 330 W / 1,5 A


INTERNAL SIZES OF THE AF10-H MODEL		
	METRIC UNITS	ENGLISH UNITS
width	530 mm	20.9"
height	750 mm	29.5"
depth	500 mm	19.7"


SUITABLE FOR

LANDSCAPE



PORTRAIT

STACK

MULTI PORTRAIT

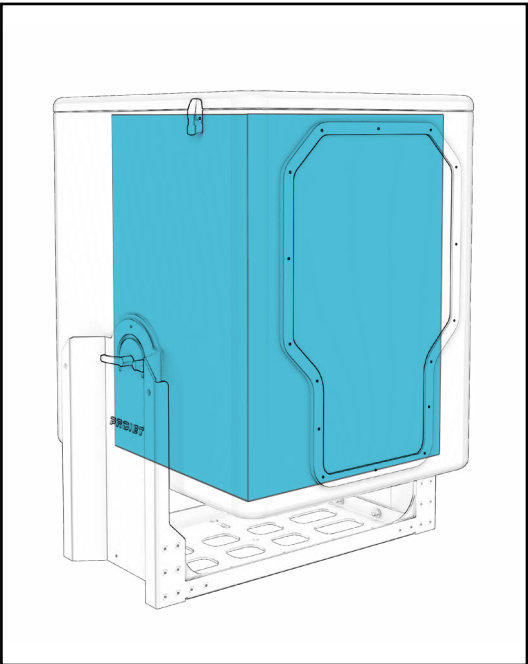

AF20

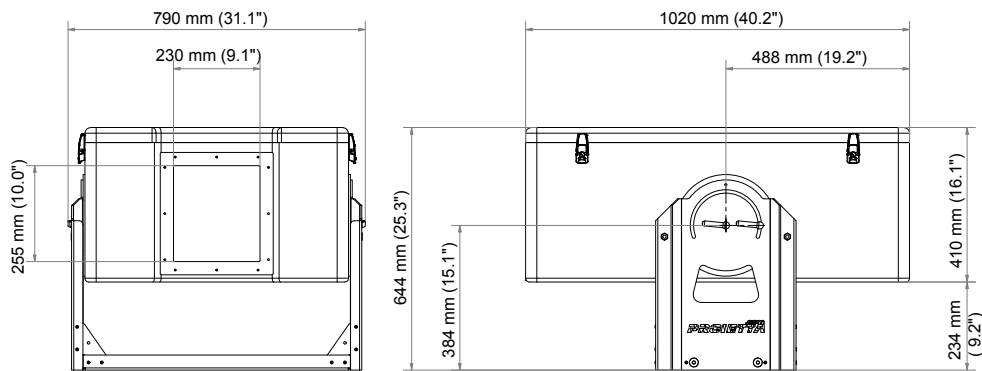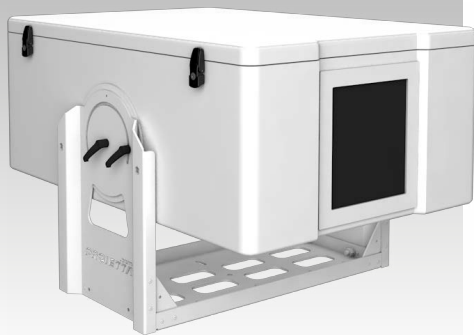


SPECIFICATIONS:


WEIGHT: 65,0 kg (143.3 lbs)


CONSUMPTION:
Max consumption cooling mode: 110 W / 0,5 A
Max consumption during heating and dehumidification mode: 500 W / 2,3 A


INTERNAL SIZES OF THE AF20 MODEL		
	METRIC UNITS	ENGLISH UNITS
width	550 mm	21.7"
height	350 mm	13.8"
depth	700 mm	27.6"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

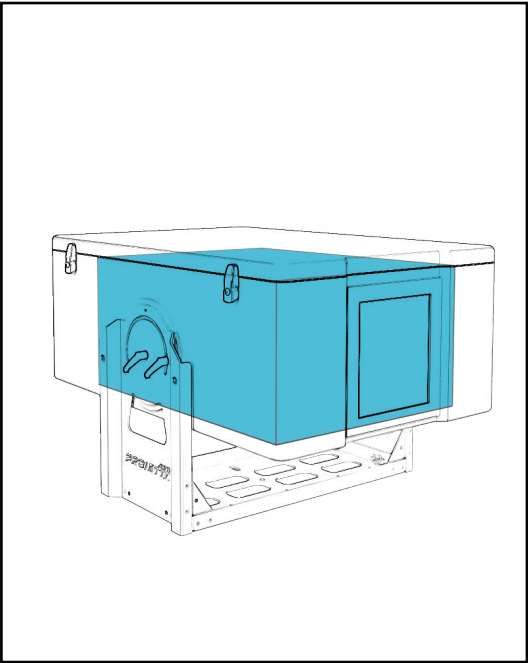

AF20-H

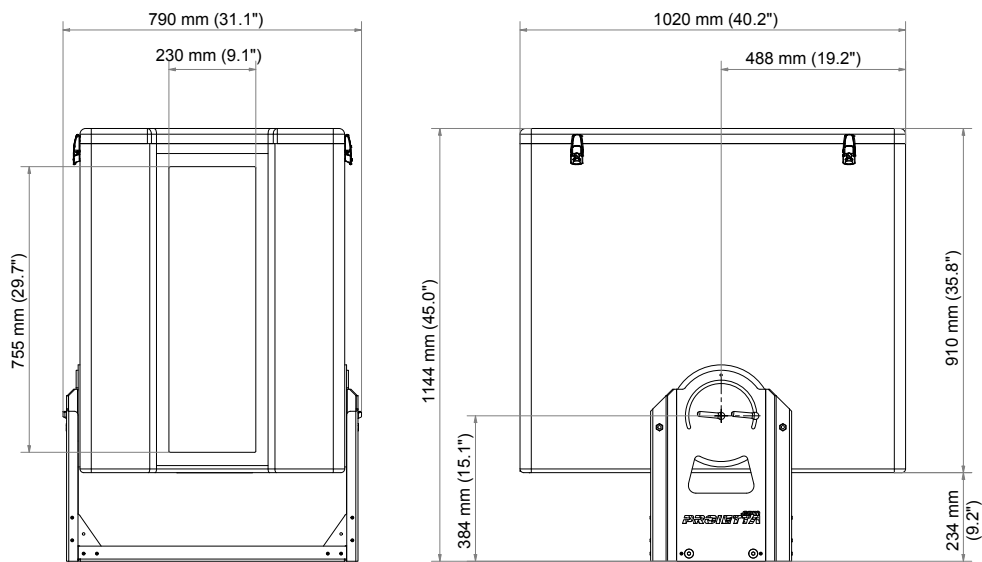


SPECIFICATIONS:


WEIGHT: 90,0 kg (198.4 lbs)


CONSUMPTION:
Max consumption cooling mode: 210 W / 0,9 A
Max consumption during heating and dehumidification mode: 500 W / 2,3 A


INTERNAL SIZES OF THE AF20-H MODEL		
	METRIC UNITS	ENGLISH UNITS
width	550 mm	21.7"
height	850 mm	33.5"
depth	700 mm	27.6"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

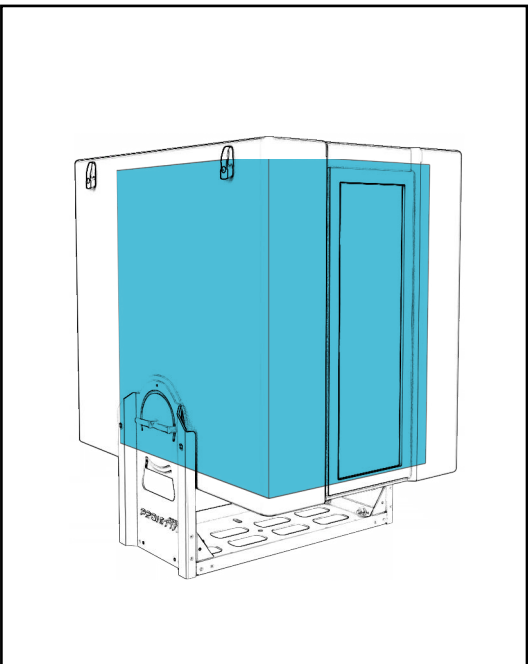

AF24

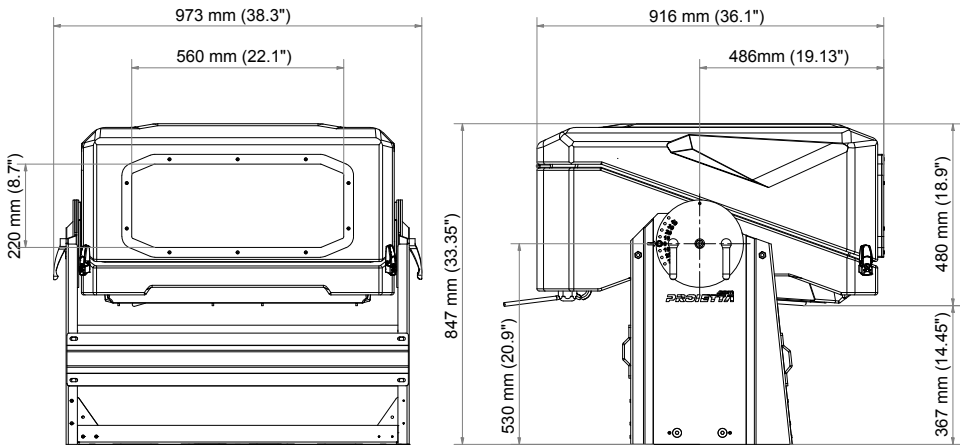


SPECIFICATIONS:

WEIGHT: 80,0 kg (176.4 lbs)


CONSUMPTION:
Max consumption cooling mode: 110 W / 0,5 A
Max consumption during heating and dehumidification mode: 500 W / 2,3 A


INTERNAL SIZES OF THE AF24 MODEL		
	METRIC UNITS	ENGLISH UNITS
width	650 mm	25.6"
height	300 mm	11.8"
depth	600 mm	23.6"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

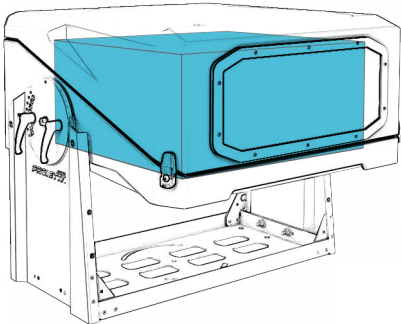

AF24-H

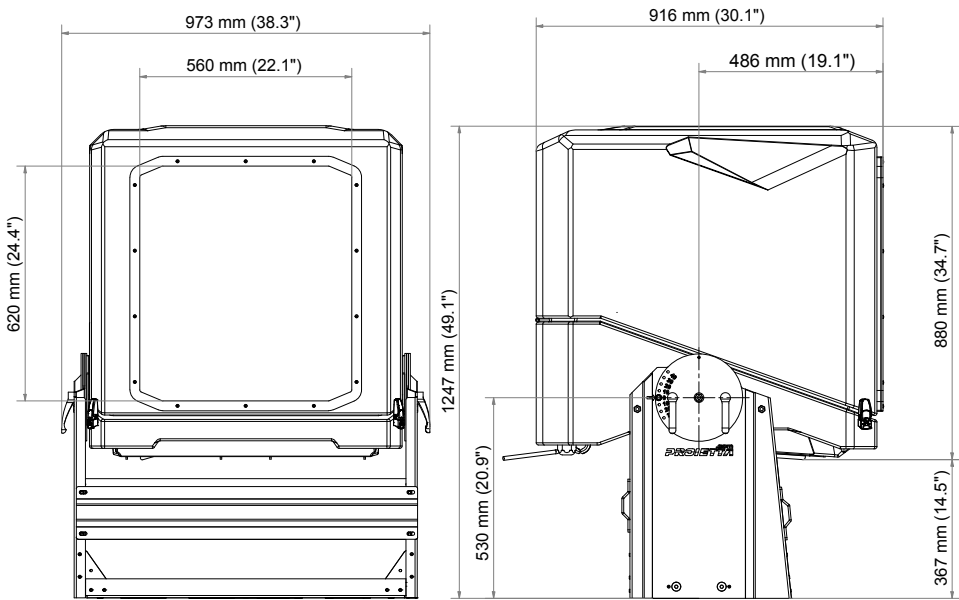


SPECIFICATIONS:


WEIGHT: 115,0 kg (253.5 lbs)


CONSUMPTION:
Max consumption cooling mode: 210 W / 0,9 A
Max consumption during heating and dehumidification mode: 500 W / 2,3 A


INTERNAL SIZES OF THE AF24-H MODEL		
	METRIC UNITS	ENGLISH UNITS
width	650 mm	25.6"
height	600 mm	23.6"
depth	600 mm	23.6"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

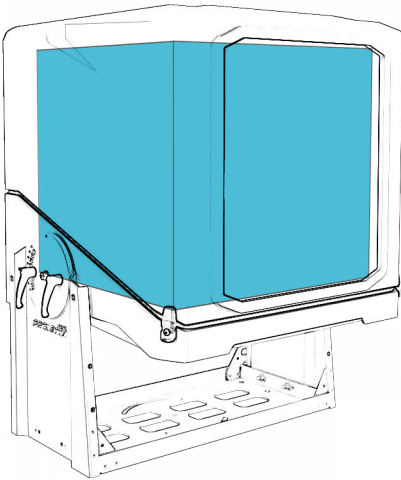

AF32

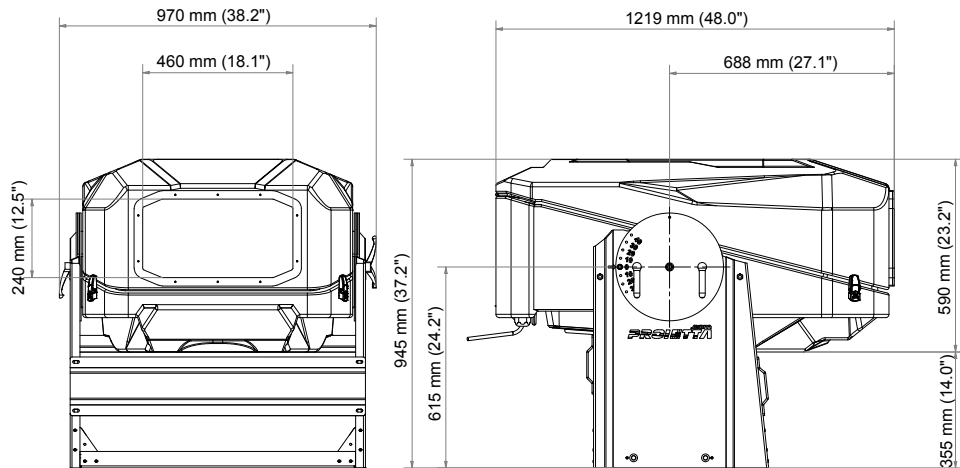

SPECIFICATIONS:

WEIGHT: 115,0 kg (253.5 lbs)

CONSUMPTION:
Max consumption cooling mode: 220 W / 1,0 A
Max consumption during heating and dehumidification mode: 610 W / 2,8 A

INTERNAL SIZES OF THE AF32 MODEL		
	METRIC UNITS	ENGLISH UNITS
width	650 mm	25.6"
height	350 mm	13.8"
depth	850 mm	33.5"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

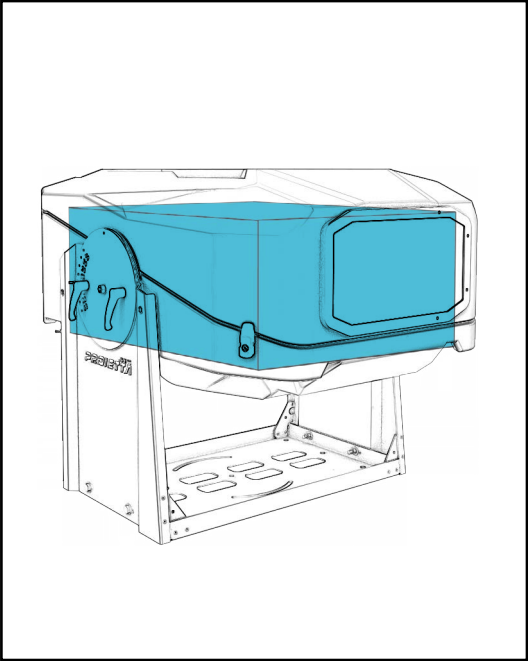

AF32-H

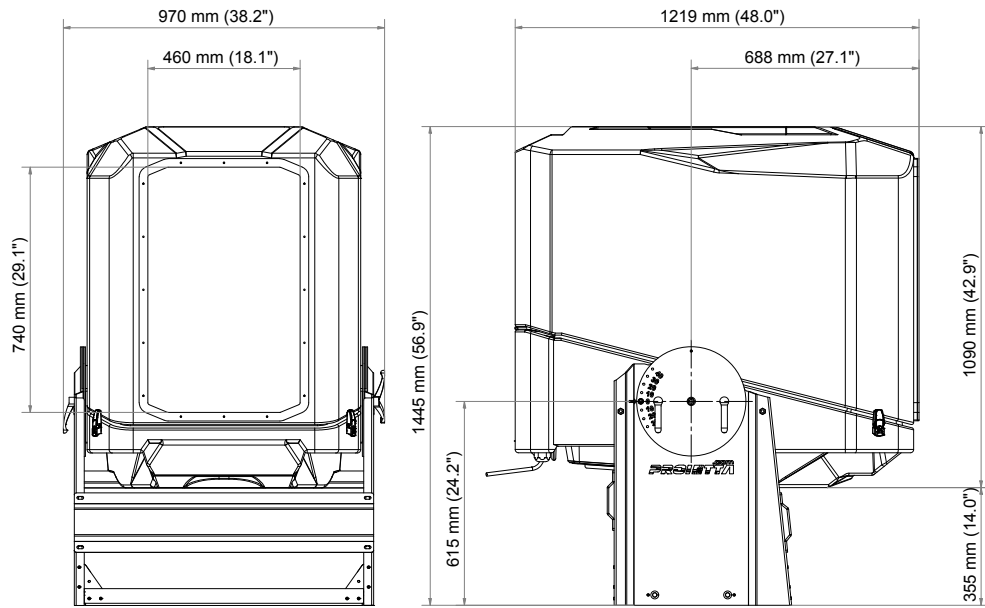


SPECIFICATIONS:


WEIGHT: 165,0 kg (363.8 lbs)


CONSUMPTION:
Max consumption cooling mode: 330 W / 1,5 A
Max consumption during heating and dehumidification mode: 610 W / 2,8 A


INTERNAL SIZES OF THE AF32-H MODEL		
	METRIC UNITS	ENGLISH UNITS
width	650 mm	25.6"
height	850 mm	33.5"
depth	850 mm	33.5"


SUITABLE FOR

LANDSCAPE



PORTRAIT

STACK

MULTI PORTRAIT

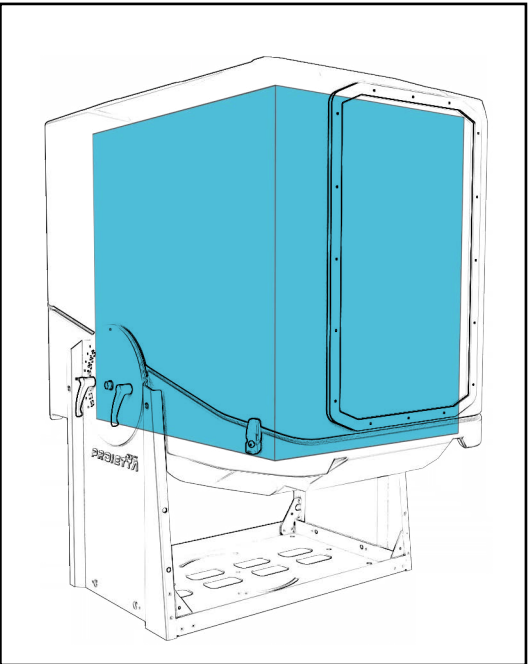

AF40

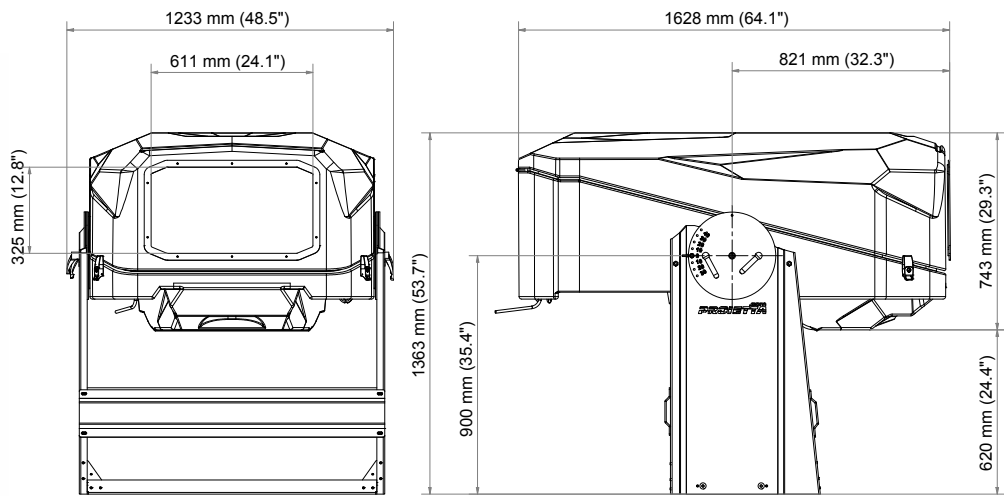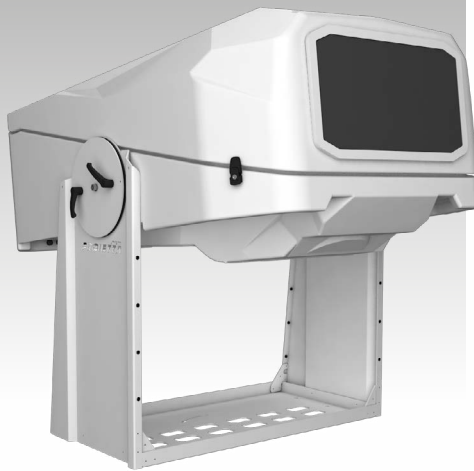


SPECIFICATIONS:

WEIGHT: 170,0 kg (374.8 lbs)


CONSUMPTION:
Max consumption cooling mode: 220 W / 1,0 A
Max consumption during heating and dehumidification mode: 610 W / 2,8 A


INTERNAL SIZES OF THE AF40 MODEL		
	METRIC UNITS	ENGLISH UNITS
width	880 mm	34.7"
height	450 mm	17.7"
depth	1250 mm	49.2"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

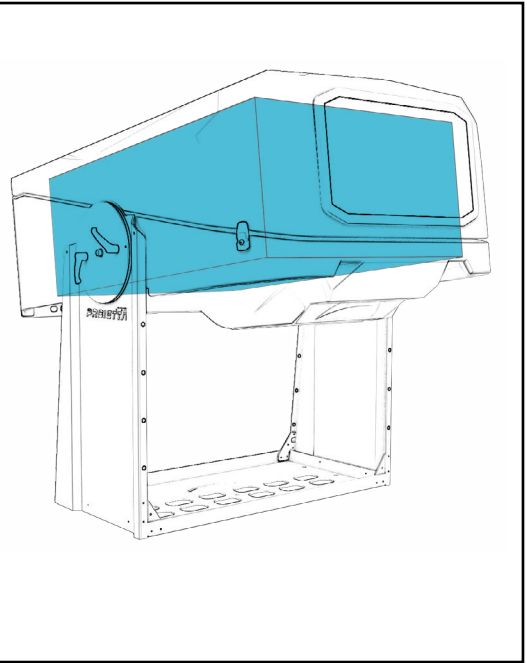

AF60-H50

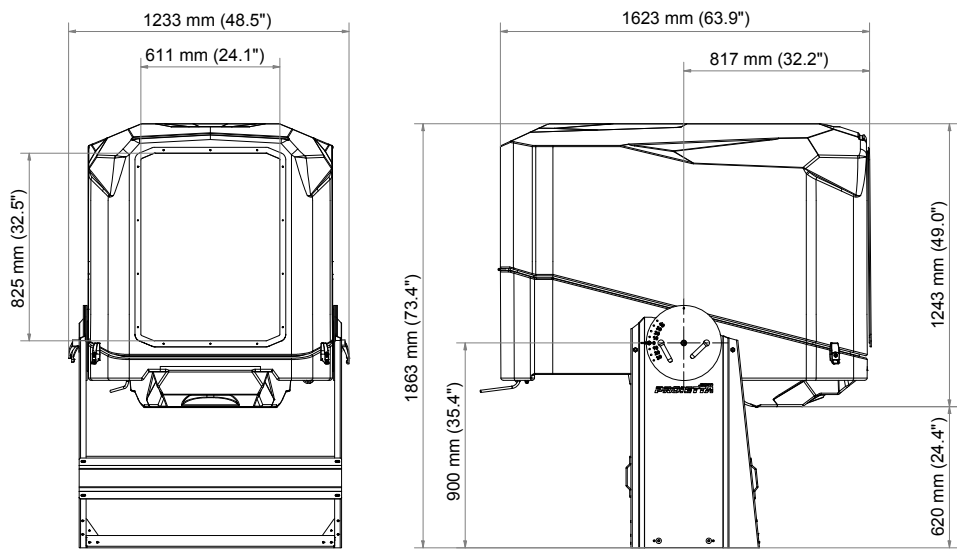


SPECIFICATIONS:


WEIGHT: 235,0 kg (518.1 lbs)


CONSUMPTION:
Max consumption cooling mode: 330 W / 1,5 A
Max consumption during heating and dehumidification mode: 610 W / 2,8 A


INTERNAL SIZES OF THE AF60-H50 MODEL		
	METRIC UNITS	ENGLISH UNITS
width	880 mm	34.7"
height	950 mm	37.4"
depth	1250 mm	49.2"


SUITABLE FOR

LANDSCAPE


PORTRAIT

STACK

MULTI PORTRAIT

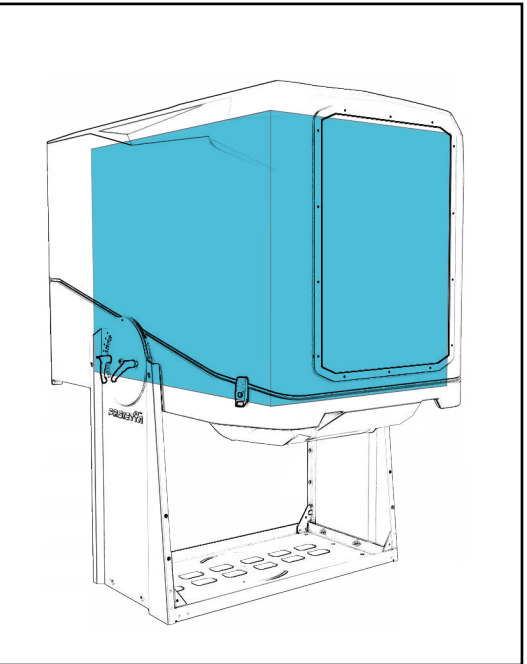

AF60-H15

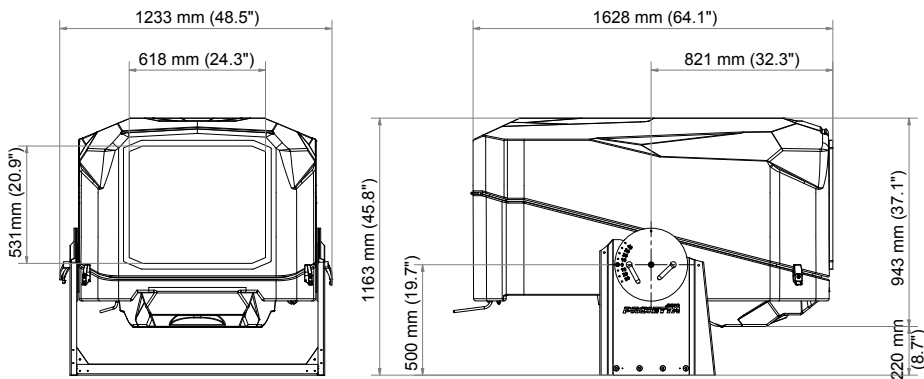

SPECIFICATIONS:

WEIGHT: 215,0 kg (474.0 lbs)

CONSUMPTION:
Max consumption cooling mode: 220 W / 1,0 A
Max consumption during heating and dehumidification mode: 610 W / 2,8 A

INTERNAL SIZES OF THE AF60-H15 MODEL		
	METRIC UNITS	ENGLISH UNITS
width	880 mm	34.7"
height	650 mm	25.6"
depth	1250 mm	49.2"

SUITABLE FOR



LANDSCAPE




PORTRAIT



STACK



MULTI PORTRAIT

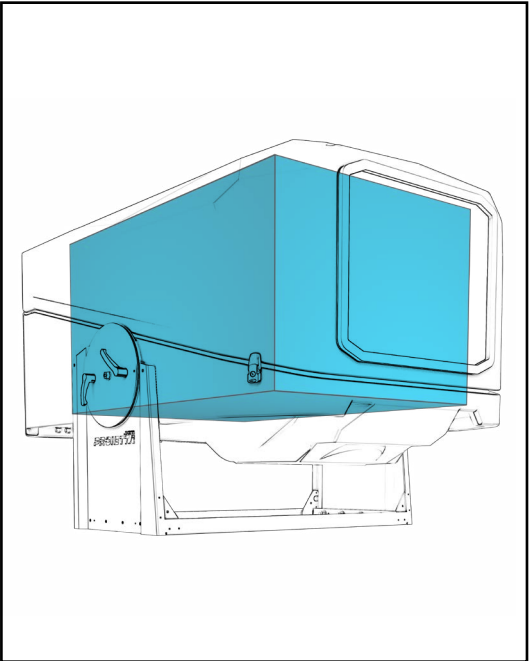

CUSTOMIZE YOUR CASE


any RAL colour is available on request



RAL 6011 + RAL 9005



RAL 9017

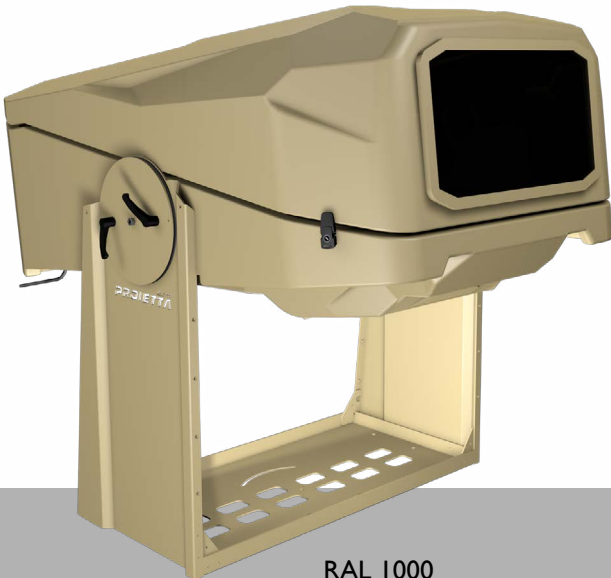

RAL 1000



RAL 5024 + RAL 9017




CUSTOMIZABLE FOR UST LENS

There are a lot of different Ultra Short Throw configuration on the market. That's why it's really important to know exactly the lens model you are planning to use.




SUPPORTING POLES

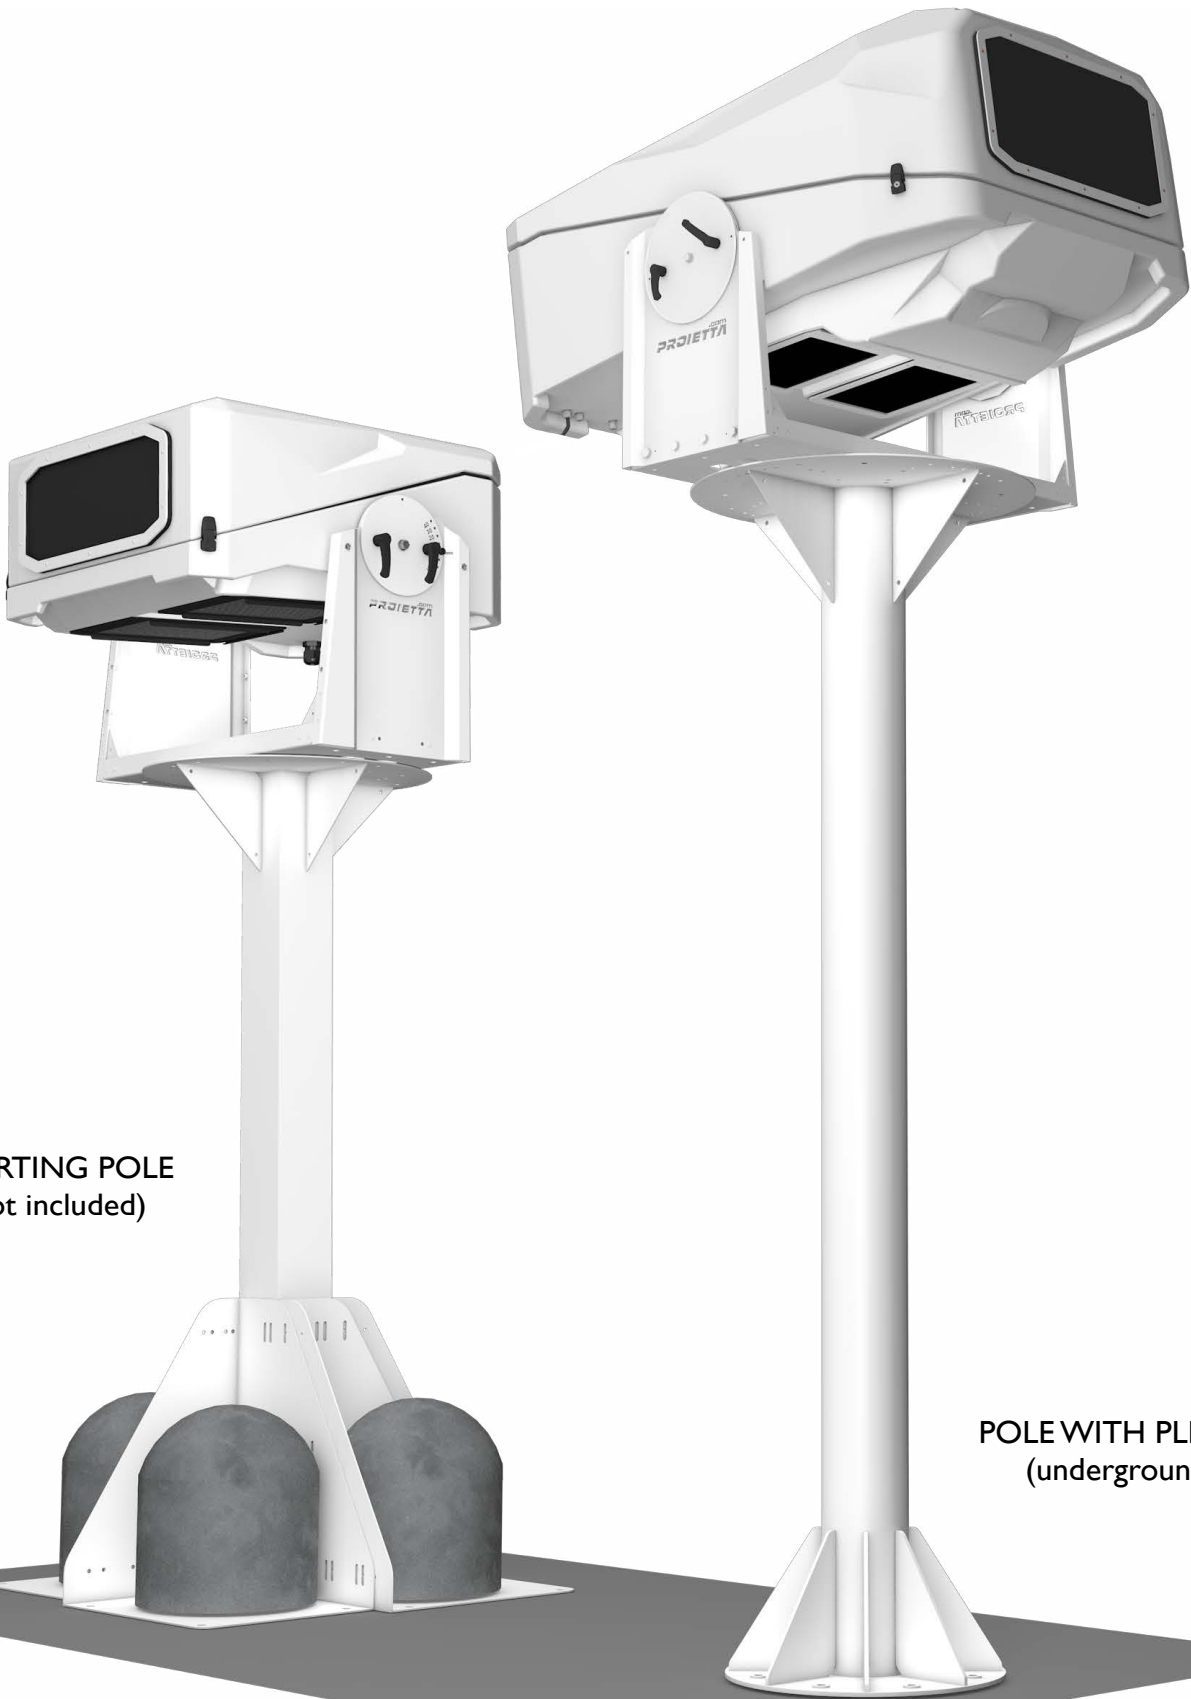

AC COOLER - SAND STORM PROTECTION



The Air Conditioning unit allows you to install beamers outdoors in very hot climates thanks to its high cooling capacity. **PROIETTA AC Cooler** reduces projector inlet temperatures assuring optimal operating conditions. Our optional AC unit also filters the air preventing damage caused by sand, dust and smog. Available for: AF24, AF24-H, AF32, AF32-H, AF40, AF60-H50, AF60-H15.

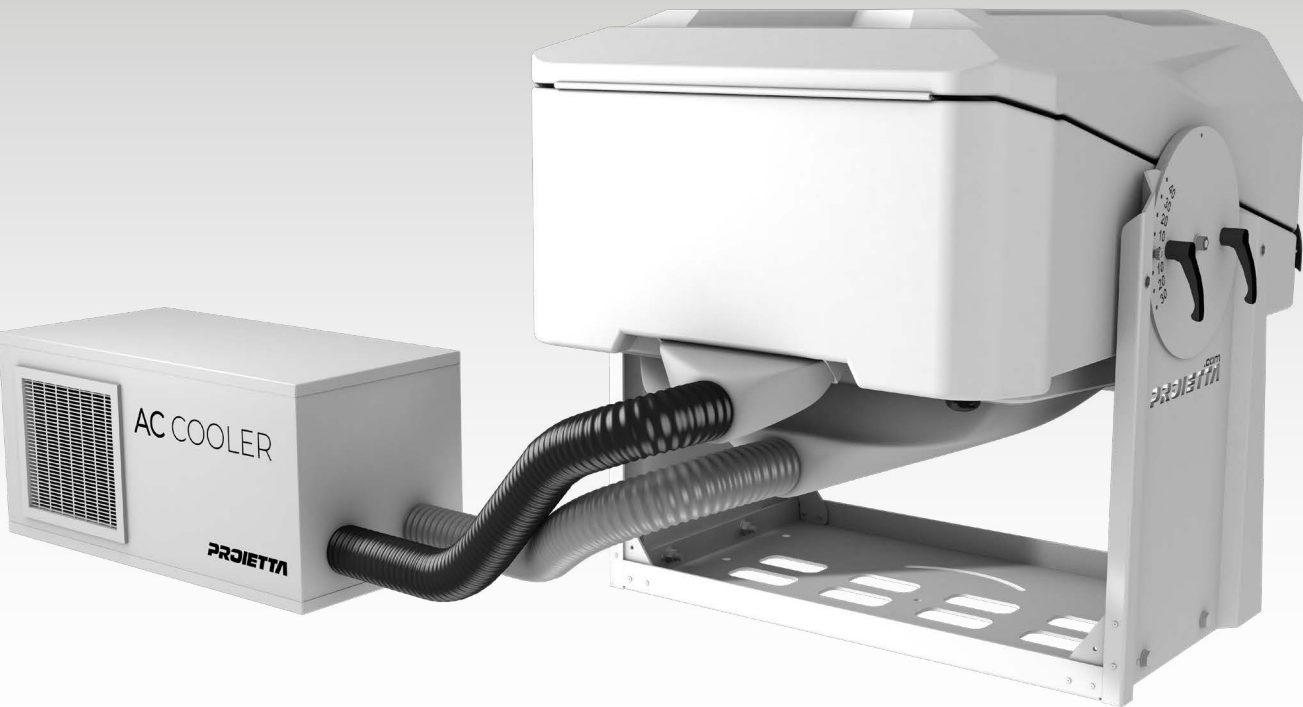


ACCESSORIES



MIRROR FOR THE PROJECTION ON FLOOR

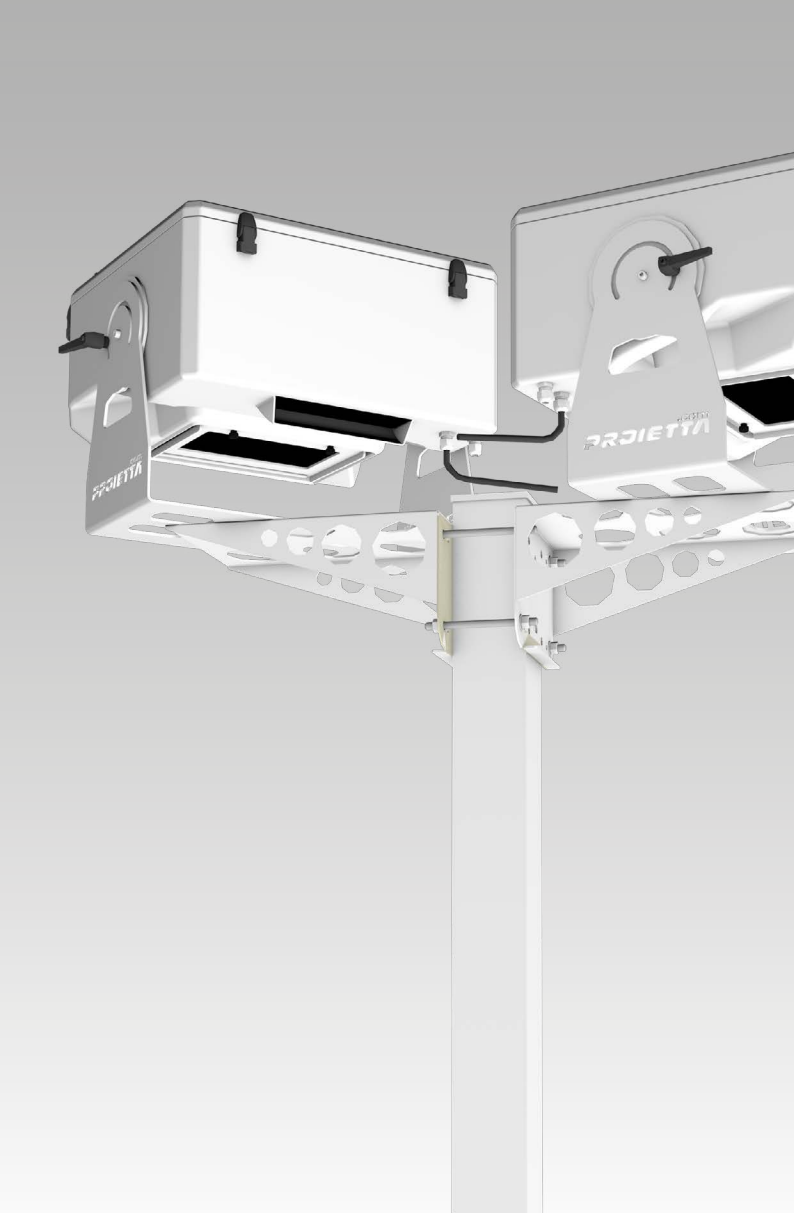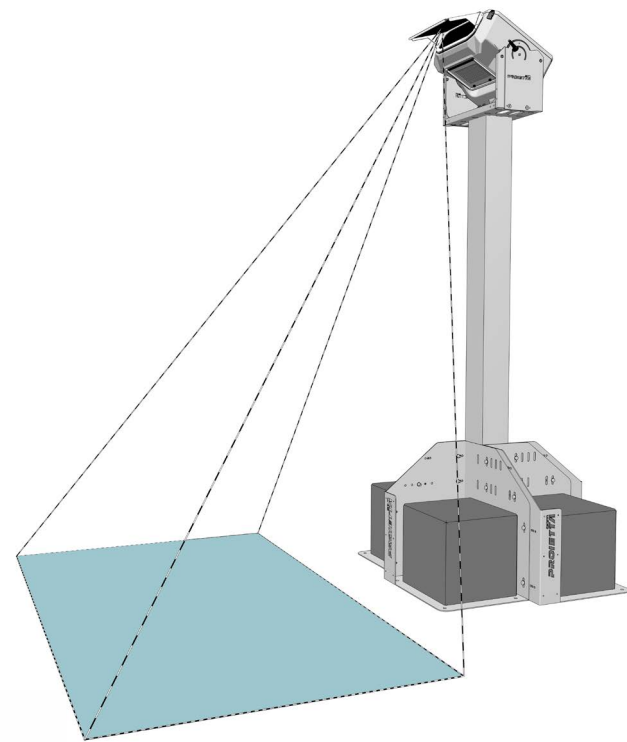

POLE AND WALL BRACKET

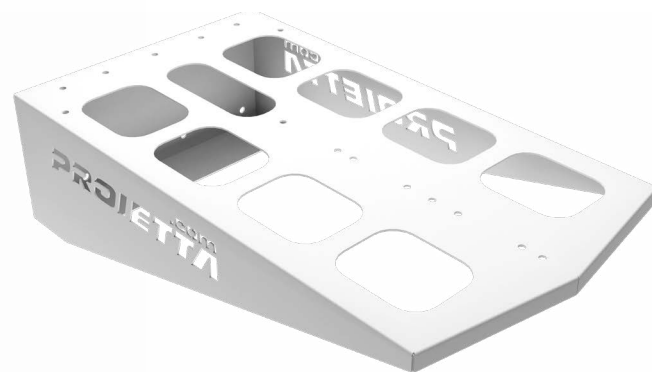

CASE MONITORED BY PROIETTA APP 




- temperature inside the case
- incoming temperature
- internal humidity
- fan operation

Each model is equipped with a Bluetooth board that allows to monitor the operating status of the protective enclosure with Android or Apple devices. As an optional feature, an Ethernet board is available that allows monitoring the operating status of the protective enclosure from a PC (remote control).



ETHERNET
remote control
ON REQUEST

STACKING FRAME

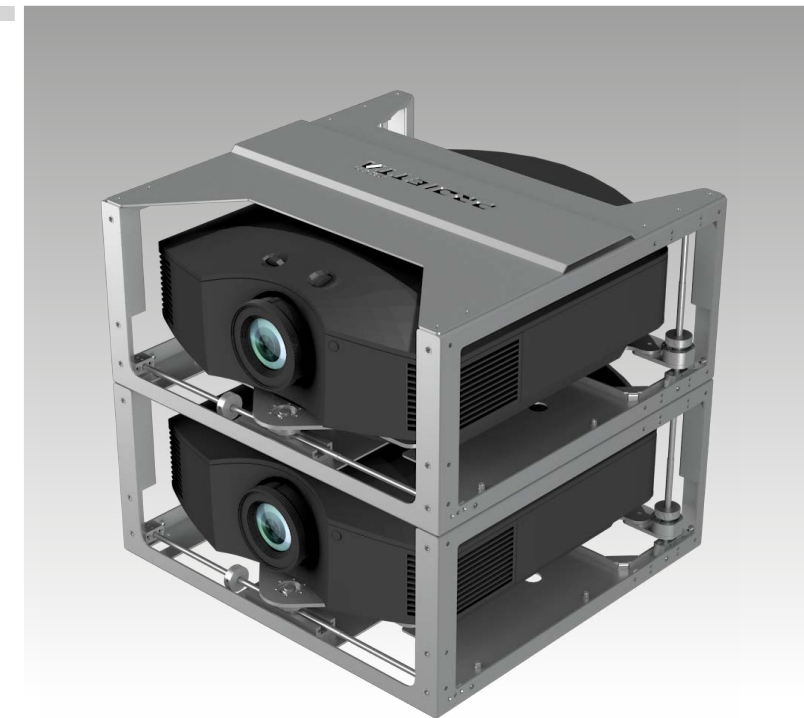

PROIETTA®

www.exteriorprojector.com

www.proietta.com

av@proietta.com

